

GENERATOR SET

Power Ratings


Voltage, Frequency	PRP	ESP
400V, 50Hz cosφ = 0.8	1250kVA / 1000kW	1375kVA / 1100kW
Engine Make / Model :	Cummins - KTA50G3	
Generator Make / Model :	Leroy Somer - LSA 50.2M6	
Control Panel :	ComAp Inteligen AMF9	
Charge Alternator [V / A] :	24V / 55A	
Battery Charger [V / A] :	24 / 5	
Battery / Capacity [V / Ah] :	4 x 150 Ah	
Block Water Heater [W] :	2 X 2000 W / 230V	
ATS Model / Length x Width x Depth * :	ATS 2000A / 1400X1750X750	

Fuel Consumption

Load	110%	100%	75%	50%
[lt / h]	293	261	199	139

Fuel Tank Capacity [lt - h] : 2000 ltrs (EXT) for open skid and canopied.

Based on diesel fuel with a specific gravity of 0.85 and conforming to TS EN590 Class A2

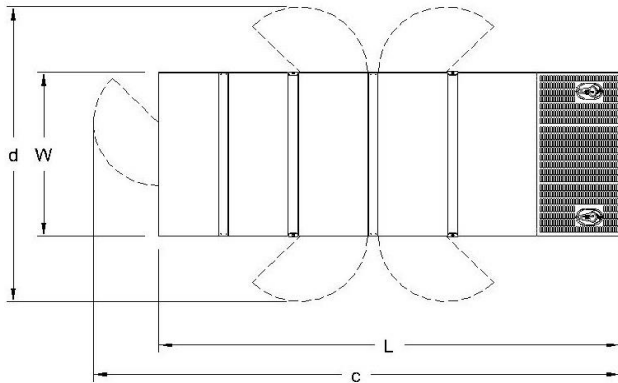

Diesel Engine

Manufacturer :	Cummins
Engine Model :	KTA50G3
No. of Cylinders / Alignment :	16V
Bore / Stroke [mm] :	158 / 158
Compression Ratio :	13,9/1
Displacement [lt] :	50,3
Engine Speed [rpm] :	1500
Gross Engine Power ESP / PRP [kW] :	1227 / 1094

Generator

Manufacturer :	Leroy Somer
Alternator Model :	LSA 50.2M6
Bearings Type :	Single
Insulation Class :	H
Winding Pitch :	2/3
No. of Wires Terminal :	6
Frequency / Poles :	50Hz / 4p
Voltage (Ph-Ph / Ph-N) :	400V / 230V
Output Power (163°C / 27°C) :	1375 kVA / 1100 kW

*Arep is standard, PMG is optional

Prime Power (PRP)

A Prime rated generator set is capable of providing power to a varying load for an unlimited number of hours per year. Ten percent overload is allowed at one in 12 hours.

Emergency Standby Power (ESP)

A Standby rated generator set is capable of providing max. power to a varying load for 200 hours per year. No overload is allowed.

Standard Reference Conditions


A specified values are given for 25°C ambient temperature, 100m above sea level and 30% relative humidity.

Dimensions & Weights

	L x W x H (mm) / c x d (mm)	Wet (kg)
Canopy :	5300 x 2250 x 3220 / TBA	11760 kg
	L x W x H (mm) / a x b x h (mm)	Wet (kg)
W/O Canopy :	5000 x 2050 x 2500 / 1655 x 1920 597	9800 kg

Dry = Without any liquid

Wet = With lube oil, coolant and fuel

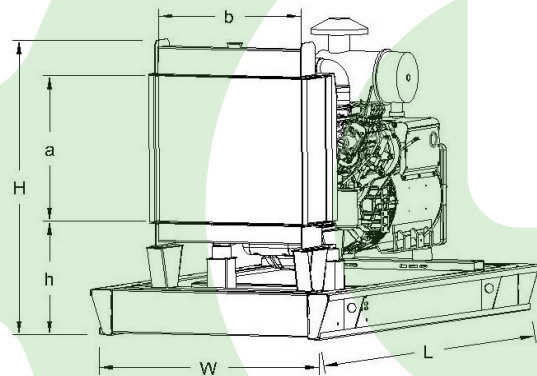

Air Intake System :	Turbo Charged, After Cooled
Governor Type / Class 8528 :	Electronic / G2
Total Oil Capacity [lt] :	177
Oil Type :	API CI-4 / 15W-40
Cooling System Capacity [lt] :	152
Recommended Fuel :	TS EN590, Class A2 Diesel
Emissions Compliance :	N/A
Housing - Flywheel :	SAE 0

Regulation Type / Model :	AVR / R450
Protection Class :	IP23
Efficiency :	95,1%
Voltage Regulation (Steady State) :	± 0.5%
THD (Total Harmonic Distortion) :	< 3,5% w/o load/ < 3,5 % on load
	15% 1100 kVA
Voltage Dip.	25% 2150 kVA
	30% 2600 kVA

f = 50Hz, cos φ = 0,6, Arep or PMG system is for given.